



APG® CASH DRAWER MultiPRO® Interface Product Guide

The MultiPRO® Interface allows APG cash drawers to connect to Point of Sale receipt printers or terminals using detachable and replaceable cables. The cash drawer has a drawer open/closed switch that may be used to report status. The cash drawer connector is an RJ45 (8-pole) modular jack in the bottom or back of the cash drawer. Refer to the APG Connectivity Guide for information on specific interface cables

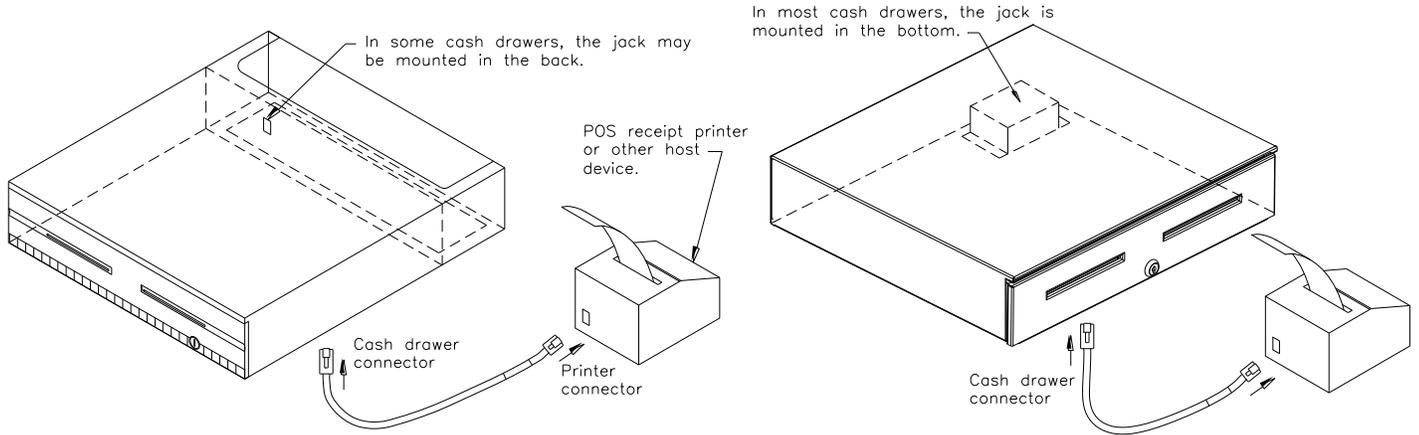

Interface cables are sold separately. Each cable is pinned, terminated, and labeled for the proper host device. Refer to the APG Connectivity Guide and the CD-*** Cable Pinout Guide for more information.

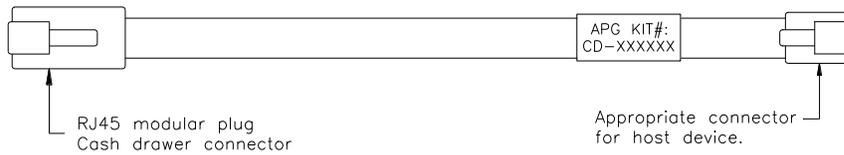

Model 320 MultiPRO® Interface – 24-36VDC applications.
Model 420 MultiPRO® II Interface– 12-20VDC applications.
Model 520 MultiPRO® III Interface – 12-36VDC multiple voltage applications.

Cash Drawer Connector Pinout:

Model:	320	420	520	
Pin 1	✓	✓	✓	Chassis Ground
2	✓	✓	✓	Drawer Status (COM)
3	✓	✓	✓	Status (COM when Drawer Closed)
4	✓	✓	✓	Status (COM when Drawer Open)
5	n/u	✓	✓	Solenoid (-)
6	✓	n/u	✓	Solenoid (-)
7	✓	n/u	✓	Solenoid (+)
Pin 8	n/u	✓	✓	Solenoid (+)